



D STEEL CONNECTOR

screw / triple lock

Extremely strong carabiner for work at heights. Thanks to its shape, it distributes the force efficiently to the main axis, which ensures its high resistance even under heavy loads. It is ideal for working at heights, creating anchor points or in industry.

DESCRIPTION

Long lifetime thanks to the zinc coating and durable steel construction.

Key-lock to prevent unwanted catching of the carabiner's hook, e.g. by loops.

Unique production number for easy record keeping at periodic inspections.

Equipped with a reliable key-lock with screw lock to prevent accidental opening.



D shape optimises force distribution and increases stability under load.

High strength and large gate opening when the lock is open.

KEY FEATURES

- large opening (25 mm)
- excellent ergonomics
- high strength (30 kN)
- long lifetime

STANDARDS

CE 1019
EN 362

FEATURES



50 kN



13 kN



20 kN



25 mm



screw = 225 g
triple lock = 267 g




unique
number





warranty

MATERIALS



● 100 % steel

TECHNICAL DATA

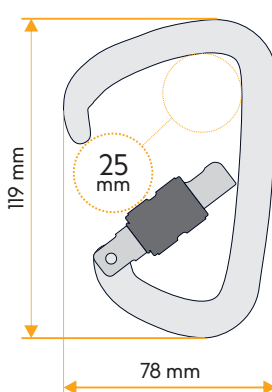

unique serial number
XXXX



production batch
MMYY (month, year)

Lifetime of this product is not strictly limited by the manufacturer. Depending on the condition of the product and its history it may be necessary to retire it immediately.



OTHER VIEWS



black colour applied using ED coating technology for longer black colour stability



GATE OPENING

18 mm

18 mm

26 mm

26 mm

WEIGHT

176 g / 6.21 oz

195 g / 6.88 oz

83 g / 2.9 oz

89 g / 3.1 oz